



INSUduct 63 specification.

Another of our innovative water management devices.

Benefits:

- Water management to new or existing properties.
- Resolve difficult water supply issues.
- Protect water services outside the thermal envelope of a building.

Features:

- A secure, insulated duct to convey either a single 63mm dia. pipe or multiple pipes over rough or unmade ground or vertically up the sides of buildings, etc.

Security:

- Sealed, tamper proof when installed.

Insulation:

- Incorporated within design, to water industry standards.

Applications:

- As part of structural alterations or water service replacements, over watercourses or voids.

Legislation:

- Compliant with all water industry legislation.

Technical data:**Size:**

2m long in two interlocking U-shaped sections.
150mm square when installed
Capacity for 63mm diameter pipe or similar.

Connections:

Any standard plumbing fitting
Sections of INSUduct 63 linked by slip joints
End caps available.

Pressure rating:

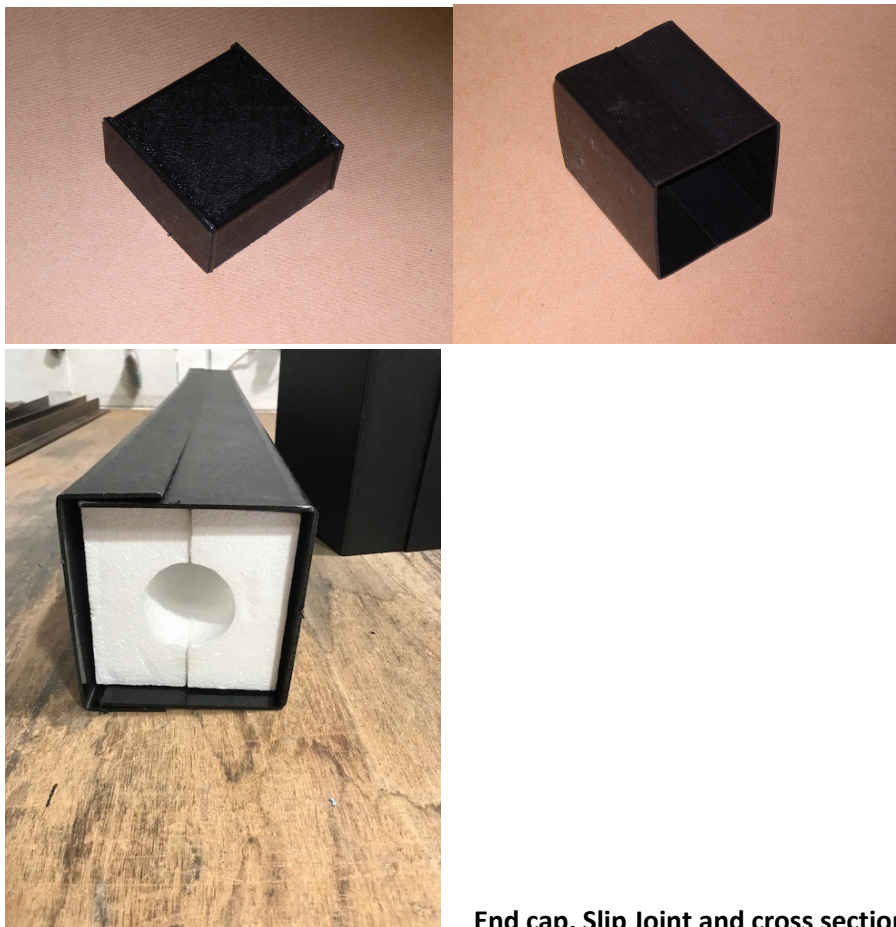
Not applicable.

Extrapolated life span:

25 years plus.

Insulation:

Dense polystyrene insulation formed to accommodate pipe as specified.

Images:

End cap, Slip Joint and cross section